

Kodak

g e t s y o u



PRODUCTION COLOUR SCANNING. THE CLEAR CHOICE FROM KODAK.

The KODAK DIGITAL SCIENCE™ Colour Scanner 3590C and Colour Scanner 4500 break the barriers of price and performance for colour production scanning. They scan at up to 85 pages per minute (ppm) (uniform letter size or A4, landscape) with all the reliability, ease of use and affordability of the Scanner 3000 Series. They share an industry-leading feeder and paper path that saves time and labor by virtually eliminating presorting, jams and rescans. And it's easy to add more pages to a stack during scanning for continuous feeding.

SCAN IT RIGHT THE FIRST TIME WITH COLOUR.

Colour capture enables the Scanner 3590C and Scanner 4500 to "see" the whole page. Virtually all the information on the page is captured: highlighting, variations in background densities and colors, handwritten annotations, stamps, etc. In many cases, colour scanning file size is not much larger than equivalent black and white, so there's no performance sacrifice for routing and storing colour on your network.

DUAL-PURPOSE COLOUR AND BITONAL OR FULL DUPLEX COLOUR; PICK WHAT'S RIGHT FOR YOU.

The Colour Scanner 3590C features bi-chromodal imaging, a Kodak innovation. It scans the fronts of documents in colour and the backs in black and white. It can also be set to scan the fronts in black and white. In addition, the Colour Scanner 3590C is designed to shift between colour and black-and-white scanning "on the fly," making it ideal for batches with mixed documents.

The Colour Scanner 4500 is available as a colour-only simplex or duplex scanner for capturing both sides of documents in colour. Pre-scan document imprinting is available on the Colour Scanner 4500DP model to facilitate indexing, document tracking and proof of scanning.


An innovative technology extends the use of colour scanning into forms processing applications. With ISIS or TWAIN drivers, MultiStream technology enables simultaneous output of 150 dpi bitonal and 200 dpi colour images. This allows for simplex and duplex colour scanning for accurate viewing fidelity, plus optimum OCR/ICR recognition from bitonal scanning.

OPERATOR-FRIENDLY AND COMPATIBLE WITH SYSTEMS AND BUDGETS.

A single button is all you push to run either colour scanner. On-board image processing maintains image quality automatically. Training is fast and simple. The scanner comes with an interactive CD, complete with video clips that help guide operators through scanner procedures.

Industry-standard interfaces and drivers bundled with the Colour Scanner 3590C and Colour Scanner 4500 enable them to support a wide range of applications. User-replaceable parts, such as lamps and feeder rollers, help keep the cost of ownership low. Plus, both colour scanners are backed by worldwide service and support from Kodak (where available).

Move up to the clarity of colour with the KODAK DIGITAL SCIENCE Colour Scanner 3590C and Colour Scanner 4500.

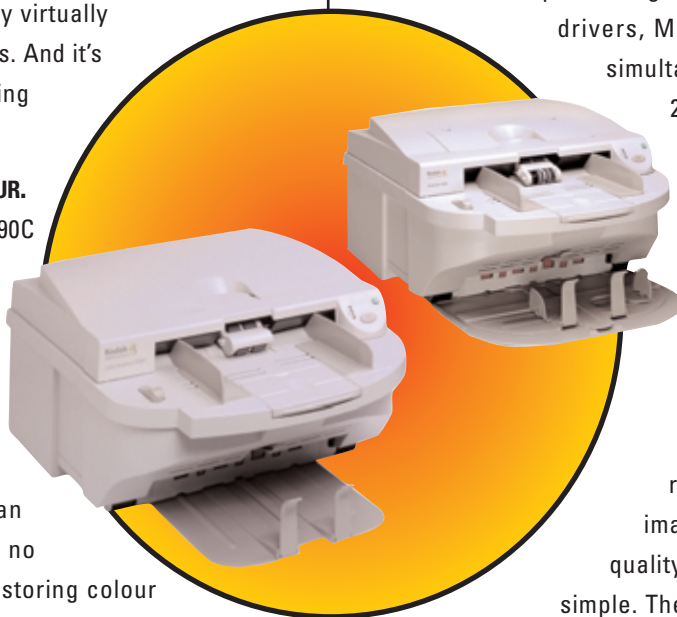

KODAK DIGITAL SCIENCE Colour Scanner 3590C and 4500

FEATURES/BENEFITS

Duplex colour scanning Colour Scanner 4500D: colour capture extracts more of the critical information from both sides of documents without any operator adjustment for clearer, easier-to-read images.

Bi-chromodal scanning Colour Scanner 3590C: captures colour content from the fronts of documents; black-and-white data from the backs. Supports duplex black-and-white scanning.

Reliable, forgiving paper transport virtually eliminates time-wasting interruptions and document presorting to enhance throughput.

Quiet operation is compatible with a front office environment.

Flexible feeding handles batches of mixed sizes and weights from onionskin to card stock to save labor; allows reloading while feeding for continuous scanning.

Automatic multi-feed detection detects document overlaps to prevent scanning errors.

Document imprinting adds indexing and tracking information to front side of documents prior to scanning (Colour Scanner 4500DP only).

User-replaceable service items reduce service calls and downtime.

Scanner CD support provides multilingual, online training and help for operators in an informative text/video format.

SPECIFICATIONS

Recommended daily volume:
from 1,000 to 10,000 pages
(up to 20,000 images duplex)

Source document input:
Minimum: 6.4 x 6.4 cm (2.5 x 2.5 in.)
Maximum: 66.0 x 30.5 cm (26 x 12 in.)
Thickness: 0.038 to 0.760 mm (0.0015 to 0.0300 in.)
Weights: 50 to 200 g/m² (13 to 110 lbs.)

Colour Scanner 3590C:
Feeder capacity: 150 pages standard (250-page upgrade optional)
Output tray capacity: 250 pages (350-page optional upgrade)

Throughput speeds:
(landscape, letter size or A4)

Scanning Mode	Resolution	Speed
Colour (3590C simplex; 4500 simplex and duplex)	100 dpi	85 ppm
	150 dpi	57 ppm
Bitonal (3590C only, simplex and duplex)	200 dpi	85 ppm
	300 dpi	57 ppm
Bi-chromodal (3590C, colour front, bitonal back)	100 dpi (front)	85 ppm
	200 dpi (back)	
	150 dpi (front)	57 ppm
	300 dpi (back)	

Colour Scanner 4500:

Feeder capacity: 250 pages standard
Output tray capacity: 350 pages
Colour Scanner 3590C and 4500:
Throat width: 30.5 cm (12 in.)
Multi-feed detection: length and thickness

Imaging:

Colour: 150 dpi CCD developed and manufactured by Kodak
Black-and-white: 600 dpi CCD developed and manufactured by Kodak

Output:

Colour: 100, 150 dpi JPEG or uncompressed, and with the ISIS or TWAIN driver, 150 dpi colour and 200 dpi bitonal simultaneously.

3590C only:

Black-and-white: 200 or 300 dpi, TIFF, CCITT Group 3-1D, 3-2D, 4 or uncompressed

Dimensions:

Height: 31.75 cm (12.5 in.)
Width: 53.5 cm (21 in.)
Depth: 70.0 cm (27.5 in.)
Weight: 29 kg (64 lbs.)

Interface support:

SCSI

Bundled drivers:

ISIS and TWAIN

Document imprinting (4500DP only):

Front side using standard ink-jet printer cartridges
Up to 40 alpha-numeric and special characters per page
Static and dynamic fields (sequential increments to 9 places)
0° and 90° orientation
Two font sizes

Environmental factors:

Operating voltage range: 100 to 127 V AC, or 200 to 240 V AC, 50/60 Hz, single phase
Operating temperature: 15 to 35 °C (59 to 95 °F)
Operating humidity: 15 to 76% (dry bulb)
Altitude: up to 2,400 m (8,000 ft.)
Acoustical characteristics:
sound pressure (max.) 70 dBA Lwa
sound pressure (max.) 64 dBA Lpa

Approvals:

UL 1950, C-UL 950, EN 60950, CE Mark, FCC Part 15 Class A, Canada ICES-003 Class A, EN 55022 Class B, CISPR22 Class B, VCCI Class 1, C-Tick Mark, Taiwan CNS 13438 Class A

Warranty: Standard: 12 month, on-site
Extended: 3 year, on-site option

Additional service options:

Post-warranty maintenance agreements are available. Installation and training services are available. Contact your Authorised Reseller of KODAK Document Imaging Products for details.



For manufacturing of imaging equipment.

We're here for you.
Kodak Service & Support

For more information about this or other Kodak products or services please contact your local Kodak officer or an authorised value-added reseller of Kodak products.

EASTMAN KODAK COMPANY
Rochester NY USA 14650
1-800-243 8811

KODAK (AUSTRALASIA) PTY. LTD.
Document Imaging
North Ryde NSW AUSTRALIA 2113
+61-2-9870 4254

KODAK (SINGAPORE) PTE. LTD.
Document Imaging
SINGAPORE 159942
+65-4769-6330

KODAK PHILIPPINES LIMITED
Document Imaging
MAKATI CITY PHILIPPINES 1299
+632-810 0331

KODAK INDIA LIMITED
Document Imaging
CHENNAI INDIA 600026
+91-44-483 1803

KODAK (HONG KONG) LIMITED
Document Imaging
NORTH POINT HONG KONG 07021
+852-2654 9330

KODAK TAIWAN LIMITED
Document Imaging
TAIPEI TAIWAN 112
+886-2-2895 1580

KODAK (CHINA) LIMITED
Document Imaging
BEIJING CHINA 100020
+8610-6561 6561

Kodak is a trademark of Eastman Kodak Company.

www.kodak.com.au/go/scanners

